


Vital patient data at a glance



Sentec Connectivity enables the transmission of oxygenation and ventilation monitoring – **tcPCO₂, tcPCO₂ drift corrected, tcPO₂, SpO₂, Pulse Rate (PR), Pulsation Index (PI) and Heating Power (HP)** – directly into **Visi-Download** software.

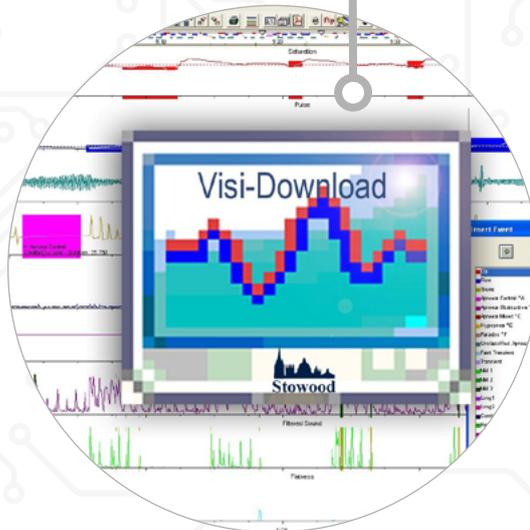

Sentec Connectivity Stowood Visi-Download

- SpO₂ analysis including automatic dip detection
- Pulse Rate analysis including automatic peak detection
- CO₂ analysis including the most important results from SpO₂, Pulse Rate and tcPCO₂ analysis displayed on a single page
- Customisable analysis report

Care with
Confidence

Sentec Connectivity

Stowood Visi-Download

Required Components	System Requirements	Description
Sentec Digital Monitor (SDM) 	Software version V08.00 to V08.03	Provides noninvasive and continuous real-time monitoring of ventilation and oxygenation
Visi-Download Software 	Software version 140715 or later and 'Sentec Download' licence	Displays and stores tcPCO ₂ , tcPCO ₂ drift corrected, tcPO ₂ , Pulse Rate (PR), Pulsation Index (PI) and Heating Power (HP)
Standard RS232 cable or USB2 Serial converter cable 		Connects SDM and PC where Visi-Download software is running

Sentec Connectivity Support Team

Let's connect.

If you need support, please contact your local Sentec representative, send an e-mail to connectivity@sentec.com or consult your Stowood representative.

Please visit www.sentec.com for more information.

Your local distributor:

sentec.

Ringstrasse 39
4106 Therwil
Switzerland
www.sentec.com
 Made in Switzerland

Sentec Connectivity Support Team:
Tel +41 61 726 97 60
connectivity@sentec.com



Stowood Scientific Instruments LTD
Common Road, Beckley
Oxford OX3 9UP | UK
sales@stowood.com
www.stowood.com
Tel. +44 1865 358860

Note: This is a global overview and may contain information on products not released in all markets/countries. Information is subject to change without notice.