


Vital patient data at a glance



Sentec connectivity enables the transmission of oxygenation and ventilation monitoring - **tcPCO₂, tcPO₂, SpO₂, Pulse Rate (PR) and Absolute Heating Power (AHP)** - to Philips patient monitors.

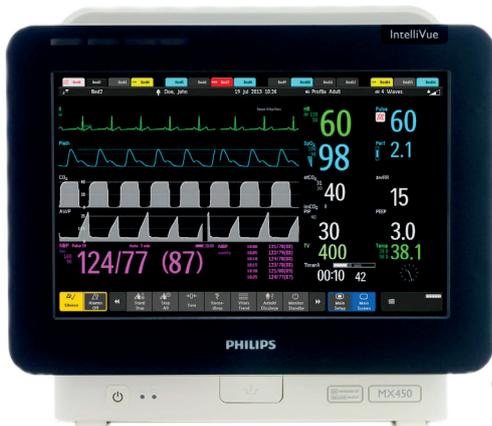

Sentec Connectivity

Philips patient monitor series

- Sentec Digital Monitor readings are duplicated on Philips patient monitors
- Related alarms and alarm settings are displayed on Philips patient monitors
- Possibility to duplicate the plethysmographic waveform

Sentec Connectivity

Philips patient monitor series

Required Components	System Requirements	Description
Sentec Digital Monitor (SDM) 	Software version SMB V07.01 and higher	Provides noninvasive and continuous real-time monitoring of ventilation and oxygenation
Patient monitors with IntelliBridge EC10 module rack 		Displays and stores tcPCO ₂ , tcPO ₂ , SpO ₂ , Pulse Rate (PR) and Absolute Heating Power (AHP) on IntelliVue™ series
	Software version Rev. H.15 or higher	MP40/50/60/70/80/90 MX600/700/750/800/850
	All software versions	MX400/450/500/550
IntelliBridge EC10 Module 		The IntelliBridge EC10 Module is inserted into the Philips patient monitor module rack
IntelliBridge EC5 ID Module 		One module connects the SDM with the Patch cable
Patch cable 		Connection between IntelliBridge EC5 Module and IntelliBridge EC 10 Module

Sentec Connectivity Support Team

Let's connect.

If you need any support, please contact your local Sentec representative or send an e-mail to connectivity@sentec.com or consult your Philips representative.

Please visit www.sentec.com for more information.

Your local distributor:

sentec.

Ringstrasse 39
4106 Therwil
Switzerland
www.sentec.com

 Made in Switzerland

Connectivity Support Team
Tel +41 61 726 97 85
connectivity@sentec.com

Note: This is a global overview and may contain information on products not released in all markets/countries. Information is subject to change without notice.